

FLD-3311-FLP

UV & Triple IR Flame (Radiant Energy) Detector



AMBETRONICS
AN ISO 9001:2015 CERTIFIED COMPANY

PESO Approved Enclosure

EN-50270
EN 61000-6-4
Compliance

Optional Air Shield



MAKE IN INDIA



Features

- Detector detects Multi-Spectral Sensitivity of fire by using UV & IR sensors
- Clear Line of Sight visual range (upto specific distance)
- Triple Spectrum Design- For long distance detection & Excellent false alarm immunity
- Sensitivity Selection - To ensure no zone cross over detection.
- High sensitivity combined with fast response time to ensure rapid & accurate flame detection.
- Multiple output options for maximum flexibility and compatibility.
 - (3) Relays for FLAME DETECTION, AUXILIARY and FAULT
 - 0 - 20mA (Stepped) or 0 - 10V (Stepped)
 - Optional HART protocol for configuration setting
 - RS-485, MODBUS compatible
- User programmable via Bluetooth, HART or RS-485.
- Heat detector extension (optional)
- Air shield for clean optics (optional)
- Date-time stamped event logging (optional)
- Built in self test (BIT)
- Mobile alert (LoRa/WiFi) (optional)
- Connectivity via IoT (optional)
- Test Lamp compatibility for safe Test

Approvals & Compliance

Approval & Compliance for Flameproof :

IIC Approval :	CIMFR Test Report No.	PESO Certificate No.
Certified to Ex d IIC T6 Gb, @ 60°C IP68 Standard Compliance : <ul style="list-style-type: none">• IS/IEC 60079-0 : 2017• IS/IEC 60079-1 : 2014• IS/IEC 60529 : 2001	IN/CIMFR/TR20/3034 Dt.: 10/11/2020	P538850/8 Dt.: 16/06/2022
	BIS LICENSE NUMBER	7800046916

- EMI & EMC Compliance:EN-50270 EN 61000-6-4

Applications

- Chemical and Petrochemical plants
- Refineries
- Onshore & Offshore Oil & Gas Installation & Pipelines
- Hazardous Storage tank farms
- Automotive industry (Paint Booth, Paint Kitchen, Production Line)
- Printing Industry
- Textile Industries
- Engine Test Cells/Room
- Fuel and gas processing and storage facilities
- Power generation
- Explosives and munitions
- Fertilizer plants
- Vehicle battery charging stations
- Aerospace industry (Aircraft Hangers)
- Waste management facilities
- Pharmaceutical industry
- Hazardous materials storage areas
- Food processing
- Warehouses
- Indoor Diesel Storage & Process
- Manufacturers & Automation Industries
- Power Plants/ Nuclear Power Sites

MUST FOR HUMAN & INDUSTRIAL SAFETY

TECHNICAL SPECIFICATIONS

GENERAL

Parameter Setting	: Field configuration settings done by Bluetooth or MODBUS RTU Protocol.
Spectral Response	: UV Band - (185nm to 260 nm) Three IR Bands - (3000 nm to 5000 nm)
Detection Range	: • n-Heptane : 88ft (27m)
(At highest sensitivity	• Kerosene : 82ft (25m)
Setting for 1ft ² pan fire)	• Diesel Fuel : 82ft (25m)
	• Methanol : 66ft (20m)
	• Gasoline : 82ft (25m)

PERFORMANCE

Response Time	: Typically Less than 5 seconds (Depending on Flame Size & Sensitivity)
Field of View	: 90° Horizontal, 90° Vertical
Adjustable Time Delay	: Upto 30 seconds
Adjustable Sensitivity	: Low, Medium and High
BIT	: Automatic self check test
Performance Test	: Performance can be tested by using Test Lamp (FTU-3311)(Safe Test)

ELECTRICAL

Supply Voltage	: 18 to 36 VDC, typically 24VDC
Power Consumption	: Less than 3W

OUTPUT SIGNAL

4-20mA Current Output	: 250 to 600 ohms load driving capacity
or 0- 10V	: Fault : 1mA Normal : 4mA Fire detect : 20mA
L.E.D. Indication	: Blinking POWER LED (Green), FIRE DETECT LED (RED) & COMMUNICATION LED (Blue)
Relay	: Three SPDT relays 6A@ 30VDC & 250 VAC for Fail safe, Fire detection & Auxiliary output.
Event Logging (optional)	: Date-Time stamped Event Logging
Communication	: RS-485 communication port with MODBUS RTU protocol.
HART Protocol	: Use for configuration changes by using
(Proprietary optional)	AEPL Communicator
Connectivity (optional)	: Mobile connectivity and SMS alert via LoRa & IoT support

ENVIRONMENTAL

Operating Temperature	: -40°C to +85°C
Storage Temperature	: -50°C to +90°C
Humidity	: Less than 95% Non-Condensing

ACCESSORIES (OPTIONAL)

- RS-485 to USB OR RS-232 converter
- Air shield
- Hooter cum Flasher
- Magnetic Wand
- Protection Cover
- Test Lamp
- Heat Detector


FLAMEPROOF HOUSING

Degree of Protection Class	: IP66 & IP68
Housing Material	: Cast Aluminium LM6 alloy or Stainless Steel
Cable Entry	: Flameproof, IP66 Double Compression Cable Gland - M20 x 1.5 (P)
Wiring	: 16-26AWG (1.5mm ² - 0.14 mm ²)
Dimension	: 155mm (H) x 263mm (W) with Hooter cum Flasher & cable gland x 125 mm (D)
(IIC Enclosure)	155mm (H) x 223 mm (W) with stopper plug & cable gland x 125 mm (D)
Dimension	: 128mm (H) x 200mm (W) with one cable gland & Stopping Plug x 97 mm (D)
(JB-90 Enclosure)	128 mm (H) x 240mm (W) with Hooter Cum Flasher & one cable gland x 97mm (D)
Mounting	: Wall or Pipe Mounting
Weight	:
• IIC Enclosure	: Approx 2.53 Kg. (LM6), Approx 7 Kg. (SS316)
• JB-90 Enclosure	: Approx 1.25 Kg. (LM6), Approx 4.5 Kg. (SS316)
• Mounting stand for IIC Enclosure	: 1.6 kg. to 2 kg.

CIMFR & PESO APPROVALS & STANDARDS


<u>JB/FLP/IIC Enclosure</u>	:
• CIMFR CERTIFICATE NO. :	IN/CIMFR/TR20/3034 Dt. : 10/11/2020
• PESO CERTIFICATE NO. :	P538850/8 Dt. : 16/06/2022
<u>JB/90FLP/IIC Enclosure</u>	:
• CIMFR CERTIFICATE NO. :	IN/CIMFR/TR20/3007 Dt. : 22/10/2020
• PESO CERTIFICATE NO. :	P538850/10 Dt. :29/06/2022
<u>Hooter cum Flasher</u>	: HCF/FLP/IIC
• CIMFR CERTIFICATE NO. :	IN/CIMFR/TR22/P/1509 Dt. : 17/08/2022
• PESO CERTIFICATE NO. :	P545941/1 Dt. : 09/09/2022
<u>Cable Gland</u>	: Double Compression Cable Gland - Model No.: CG/FLP/2C M20 x 1.5 (P) ½" NPT & ¾" NPT
• CIMFR CERTIFICATE NO. :	CIMFR/TC/P/1313 Dt. : 19/09/2018
• PESO CERTIFICATE NO. :	P431645/2 Dt. :19/11/2019
<u>Stopping Plug</u>	: SP/FLP/2C - (M20 x 1.5P)
• CIMFR CERTIFICATE NO. :	CIMFR/TC/P/1314 Dt. : 19/09/2018
• PESO CERTIFICATE NO. :	P431645/3 Dt. :19/11/2019

UV & IR SPECTRUM

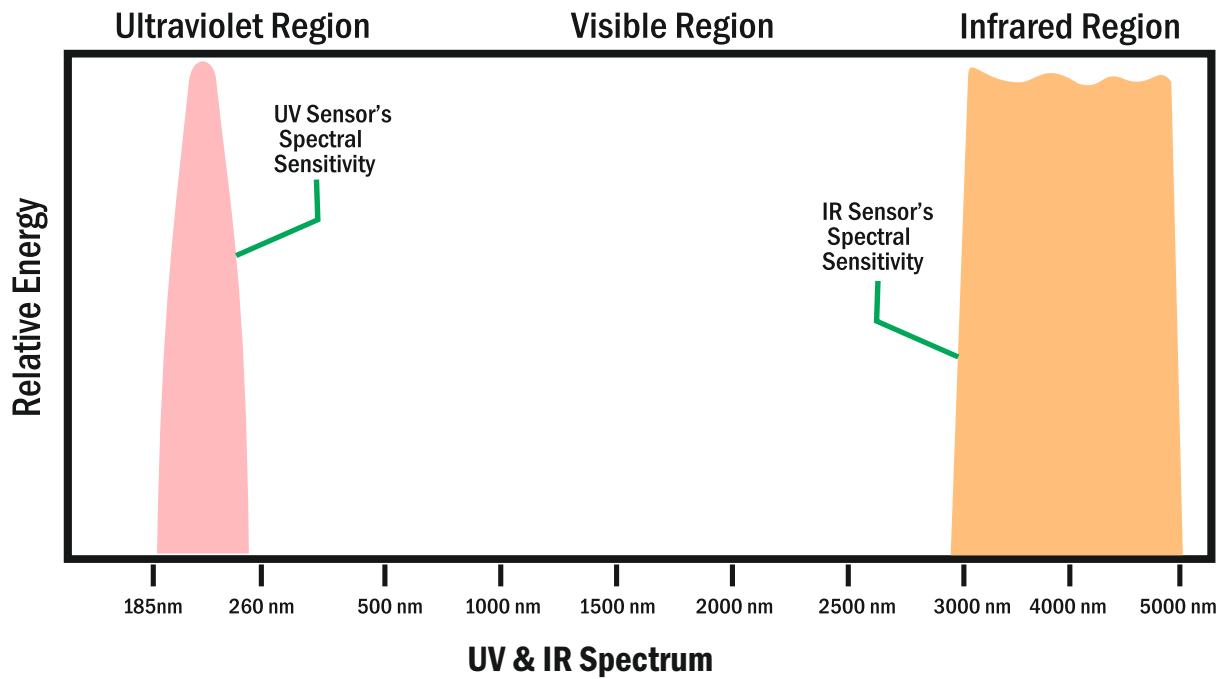


FIELD OF VIEW

90° HORIZONTAL

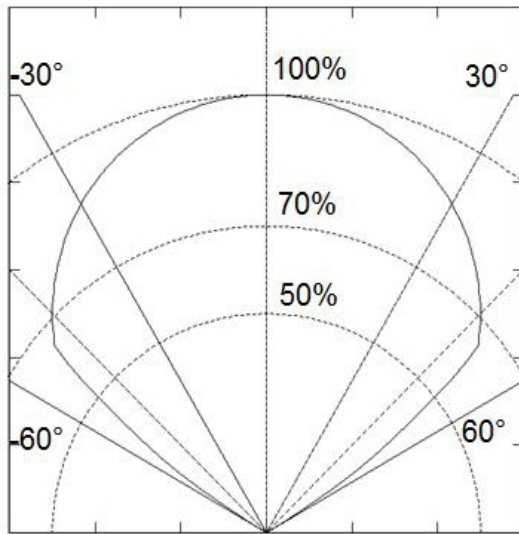

90° VERTICAL

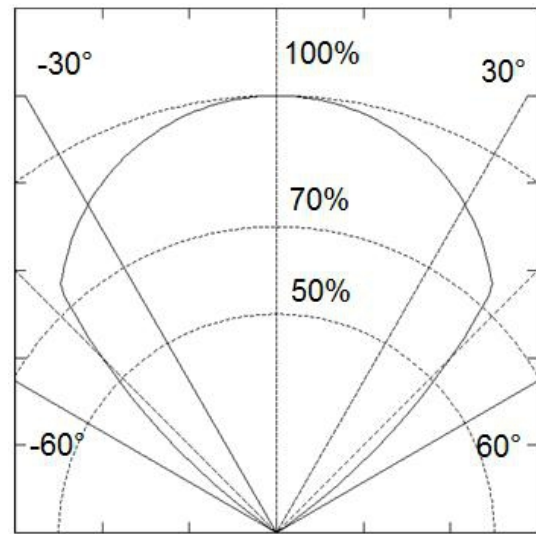

ORDERING INFORMATION

FLD-3311-FLP-UV & IR3	A	B	C	D	E	F	G
	A) Enclosure (FLP) 1) JB-FLP-IIC 2) JB - 90	B) Housing Material 1) LM6 2) SS-316	C) Transmission Output 1) 4-20mA / 0-10V 2) 4-20mA with HART	D) Hooter cum Flasher 1) No 2) Yes	E) Heat Detector 1) No 2) Yes	F) Air Shield 1) No 2) Yes	G) Test Lamp FTU-3311 1) No 2) Yes

*Before placing order please refer the above ordering information of contact below address for assistance.

Manufactured by :



CIMFR



ISI



PESO



MSME



NSIC



GeM
Government e Marketplace



AMBETRONICS ENGINEERS PVT. LTD.

17-B, 16, 14A, Tarun Industrial Estate, New Nagardas Road, Mogra Pada, Andheri (E.) Mumbai - 400 069, India.



+91-22-69623389

+91-22-61673021/22



+91-93207 37646

+91-91674 18106



sales8@ambetronics.com

sales11@ambetronics.com

Follow us on



Version : FLD-3311-FLP-R9-25-07-2023