


GLA-222-B

Gas Leak Detector for Domestic Kitchens for Detecting Leak of LPG & PNG Gas



AMBETRONICS
AN ISO 9001:2015 CERTIFIED COMPANY

Stay Alert, Make Danger Avert

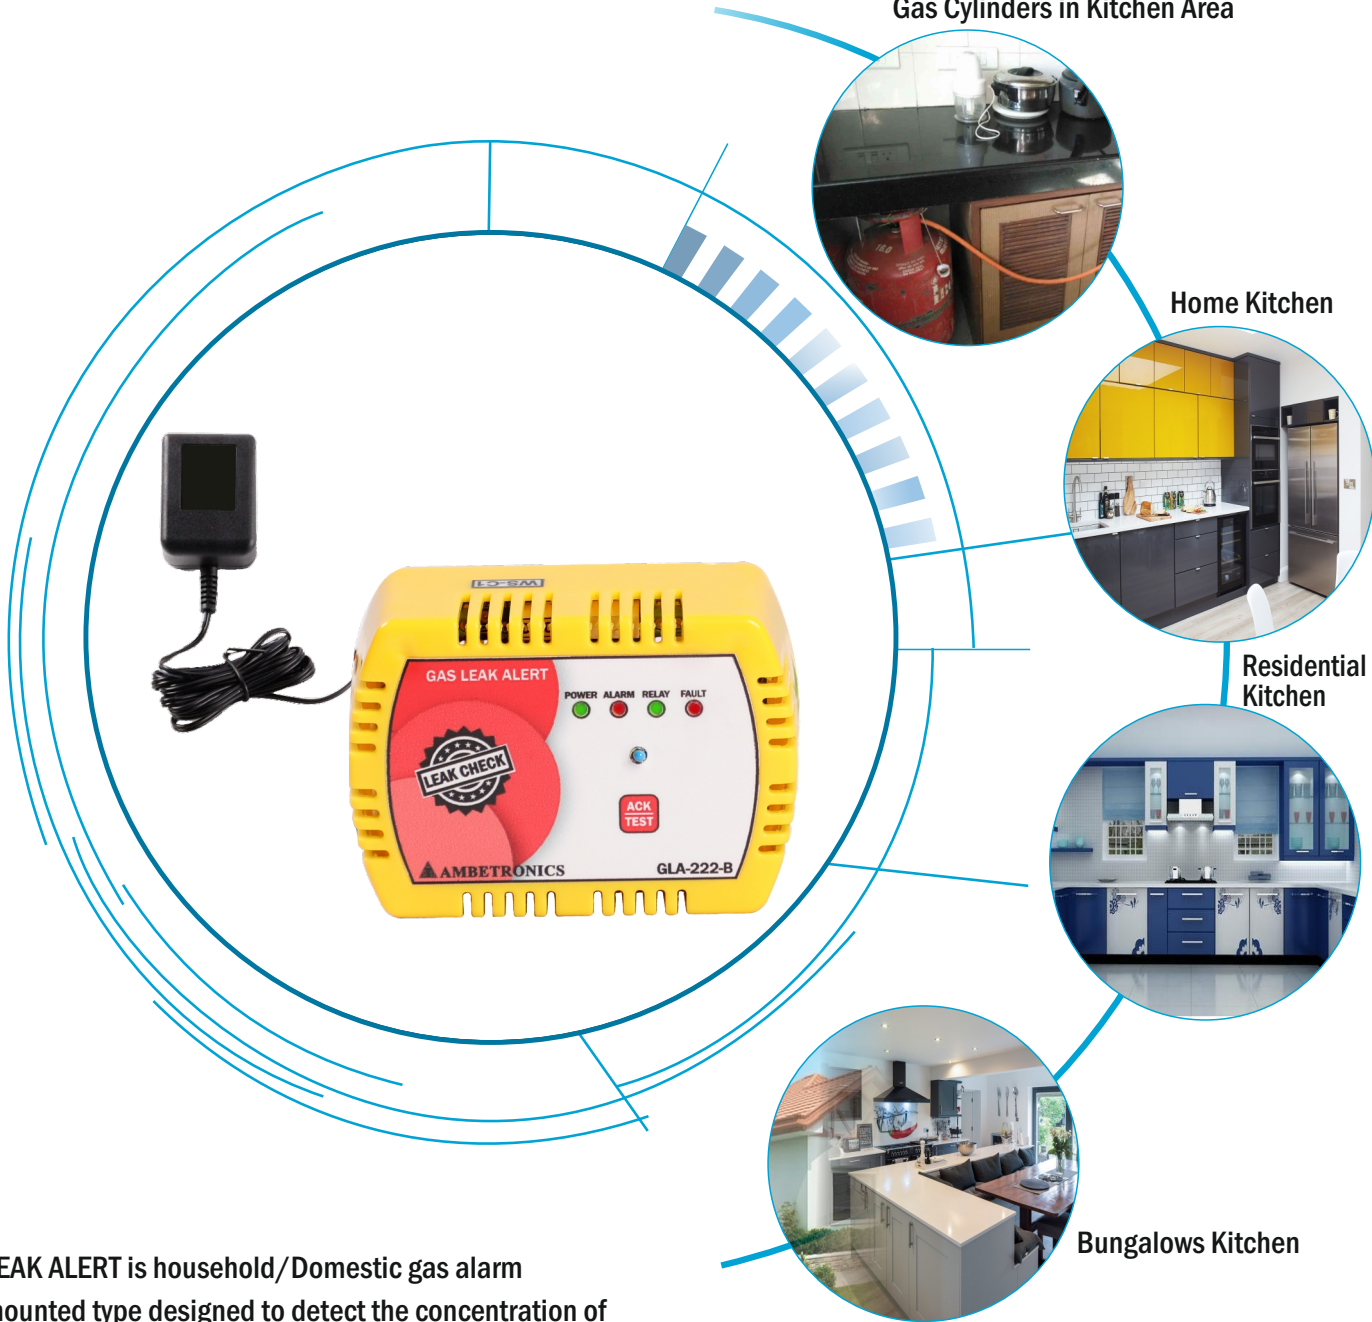

GAS LEAK ALERT is household/Domestic gas alarm wall-mounted type designed to detect the concentration of Combustible Gas or vapours using fast response sensors and manufactured with advance featured technology. It provides visual and audible alarms when the gas concentration crosses the pre-set alarm levels and alerts user to take immediate required actions.

Applications

- Residential Kitchen
- Bungalows Kitchen

Features

- Provides Fast & Reliable Response by using Semiconductor Technology for detecting leak of LPG /PNG Gas.
- Optimized for detection of smallest gas leak with integrated Buzzer and L.E.D. indication.
- Provides visual and audible signals when the gas concentration cross the Pre-set Alarm level .
- Helps to detect Gas and Excess Temperature indication.
- Easy installation, simple Plug-in design for home use, 230VAC powered.
- Optional Single Alarm Relay to operate shut off valve.

MUST FOR HUMAN & INDUSTRIAL SAFETY



LPG stands for Liquefied petroleum gas, it is heavier than air, so when LPG (Liquefied petroleum gas) leaks, it start to settle down at ground level. Ambetronics refer to must be install LPG detector at 30-40 cm from the floor level.

PNG stands for piped natural gas, it is lighter than air, so when PNG (Natural Gas) leaks, it start to settle at ceiling level. Ambetronics refer to must be install PNG detector at 30-40 cm from the ceiling level.

TECHNICAL SPECIFICATIONS

GENERAL

Gas Sensor : Semiconductor
 Gas Sampling : Diffusion
 Response time : Less than 5 sec. at excess leak (Resume Automatically)
 Alarm Method : Visual & Audible
 Sound Level : ≤ 85dB
 Warm up time : 1 min

ELECTRICAL

Operating Power : 24VDC / 230VAC ± 10%, 50Hz
 Power Supply : 3 pin plug socket (230VAC Adaptor)

ENVIRONMENTAL

Operating Temp. : 0 to +55°C
 Storage Temp. : 0 to +55°C

OUTPUT

Optional : Single Relay of rating 5A/24VDC, to operate shut off valve

TEST FUNCTION

For 'TEST' : Long press this key to check the L.E.D.'s, Relay & Buzzer functionality
 For 'ACK' : Press this key to acknowledge audio Alarm (Buzzer).

DIMENSION

Enclosure Material : ABS Plastic
 Over all dimension : i) GLA-222 - B : 70 (H) x 100 (W) x 40 (D) in mm
 Mounting : Insert in 3 PIN Plug / Hang on wall through screw hole
 Weight : Approximately 100 grams

ORDERING INFORMATION

GLA-222-B

A

B

A) Plug-In facility

- 1) 3 pin plug (230VAC Adaptor)
- 2) 24 VDC

B) Output

- 1) Single Relay to operate shut off valve
- 2) None

Manufactured by :



AMBETRONICS ENGINEERS PVT. LTD.

17-B, 16, 14A, Tarun Industrial Estate, New Nagardas Road, Mogra Pada, Andheri (E.) Mumbai - 400 069, India.

+91-22-69623389 +91-93207 37646 sales8@ambetronics.com
 +91-22-61673021/22 +91-91674 18106 sales11@ambetronics.com



Follow us on

Version : GLA-222-B- R3-2-07-2022